

Remote Secure KVM Controller



KEYBOARD AND MOUSE EMULATION

The SEKURYX KVM Remote Control improves and innovates the standard Secure KVM user experience. When paired with a SEKURYX Secure KVM, the KVM Remote Control provides channel selection options for 1-4 port KVMs. For organizations that maximize efficiency and minimize clutter SEKURYX has the correct solution. Combined with the mounting options available for all SEKURYX Secure KVM Units our new KVM Remote Control allows full functionality of the KVM while neatly obscure from vision, offering an optimal decluttered workspace.

RCK-100


KEY FEATURES

- Compatible with any new switch from the existing Secure KVM and KM line
- Support for Keyboard and Mouse extension to control the connected PCs up to 100 ft away
- Easily switch between channels and activate CAC up to 100 ft away from the switch
- Instant synchronization with front panel indicators on the Switch
- Can connect to any switch, up to 4 channels available
- Connect Directly to the Existing KM USB Slot on the KVM - No Need for Proprietary Connections

APPLICATIONS

- Government Operations
- Defense Applications
- Secure Control Rooms
- Corporate Communications
- Server Operations
- Educational Administrations
- Medical Facilities
- Banking Network
- Insurance Data Centers
- Transit Management
- Industrial Operation
- Intelligence Communications

INSTALLATION DIAGRAM

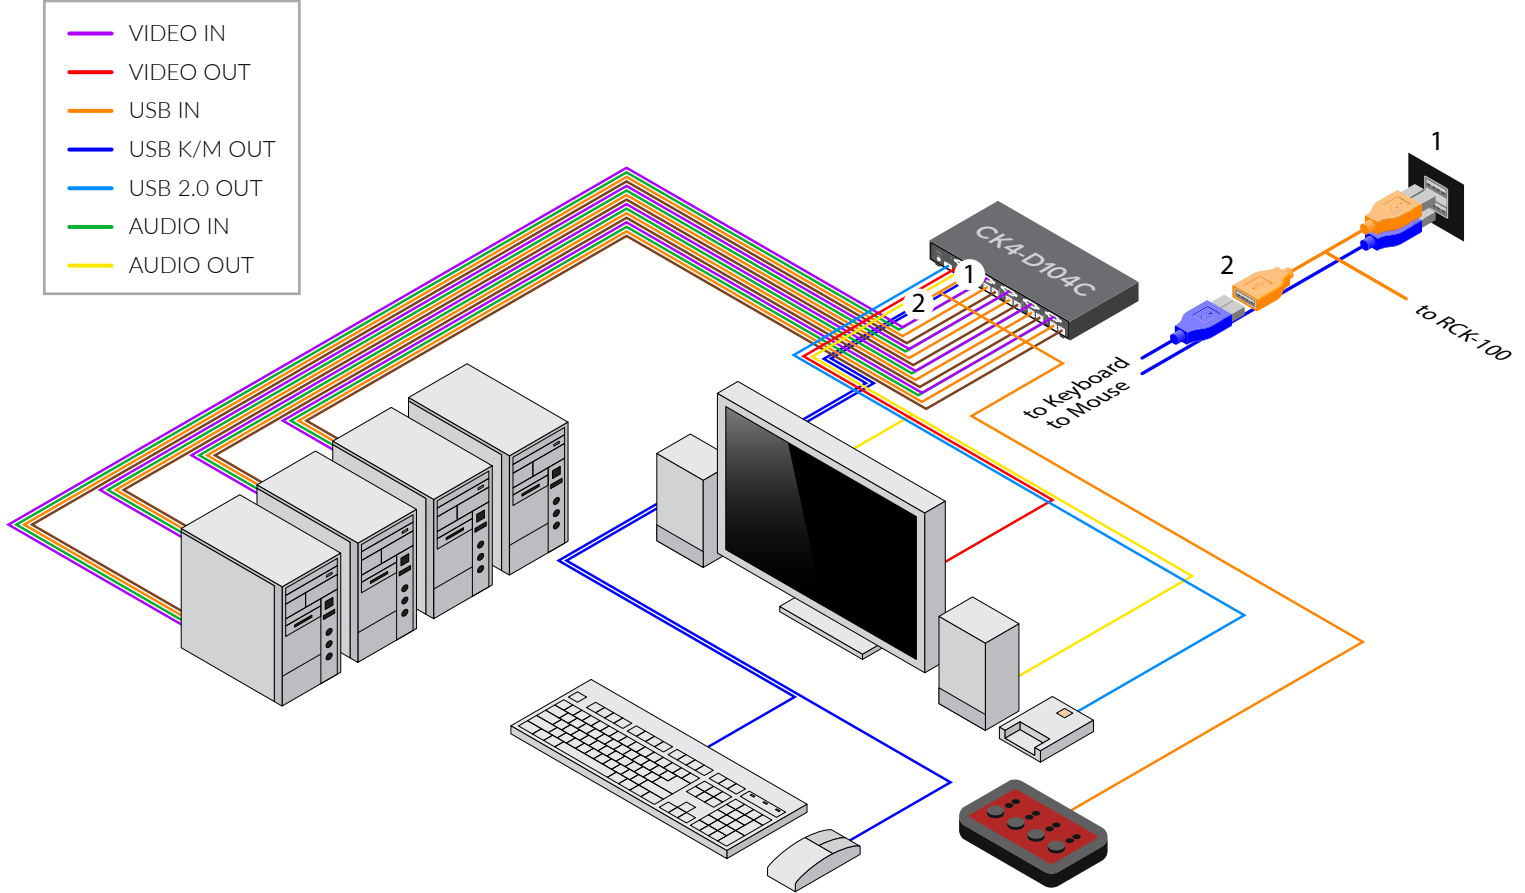

TECHNICAL SPECIFICATIONS

USB	
Signal Type	USB 1.1 and 1.0 Keyboard/Mouse only
USB Type A Male	Connection to KVM
USB Type A Female	Connection to Keyboard and Mouse
User Console Output Interface	(1) USB Type-A for keyboard, mouse connection

OTHER	
Power	5V DC, 1A power supply via USB
Dimensions	2.36" L x 1.46" W x 0.67" H
Weight	0.4 oz
Operating Temp.	+32 to +104°F (0 to +40°C)
Storage Temp.	-4 to 140°F (-20 to +60°C)
Humidity	Up to 80% (no condensation)

ORDERING INFORMATION	
Part No.	Description
RCK-100-S	Remote Secure KVM Controller. Includes: [RCK-100]